

Smart Baby Monitoring Kit

Quick Operation Manual



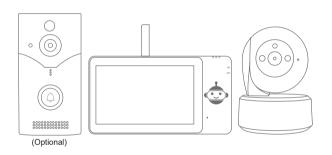

Product Instruction

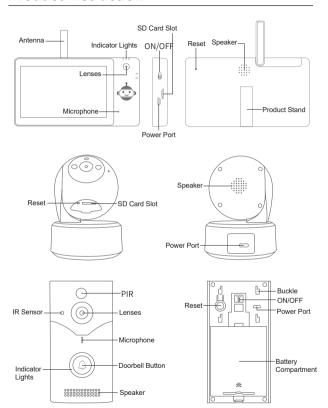


Product Application

The indoor host and camera are paired at the factory and can be used immediately after power on (supports up to 4 channels). If you need to add a doorbell or camera, please refer to the operation guide in FAQ3 (page 7).

1. Power on

- (1) Connect the indoor host (12V--1A) and the camera to the power supply (Figure 1). or turn the ON/OFF button on the back of the doorhell to ON
- (2) Turn the indoor host ON/OFF button to ON. After about 10 seconds, the host will enter the desktop.



Indoor host function introduction:



Function menu area

- 1. @ Camera Management 2. Time alarm clock System Settings
- Operation menu area
- 1 (1) Power switch 3. ◀ Return 5 Current Tasks 7 ≥ Hide Menu
- (Swipe down from the top 2.

 ■ Volume down 4.

 Home 6.

 ■ Volume Up of the screen to bring up

the system operation menu bar)

2. Connect to WiFi

Click Go to System Settings -> Network & Internet -> Select 2.4GHz Wi-Fi and enter the password to connect. (This product only supports 2.4GHz Wi-Fi)





Click to enter the camera management -> Click the play button to output the image.





3. Add device to SriHome App

Step 1: SriHome App Installation

Method 1: Search for "SriHome" on Google Play or iOS App Store.


Method 2: Scan the QR code to download "SriHome" App.



Step 2: Registration & Login on SriHome App

Step 3: Add device to SriHome App

Please follow the instructions of the SriHome App to add the device. (The device ID is on the label of the host)

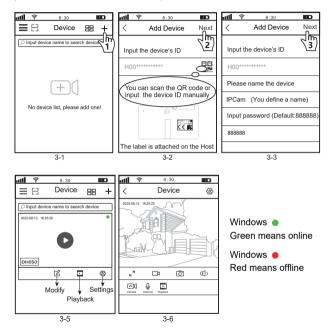


FAQ

FAQ1: Adding a camera to the App

Cameras and doorbells can be added to the APP separately and viewed remotely on a mobile phone.

Open the SriHome App, click the "+" button in the upper right corner to add a device, and follow the app's instructions, as shown below:

(The device ID is on the camera's label)

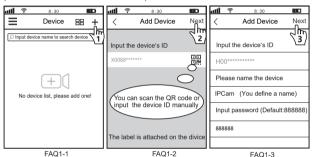


After entering the device ID, enter the device name and password, click Next, and you can use it

atil

8:30

Device







FAQ2: Share the smart doorbell or camera to other users

The device supports multi-user viewing. Download SriHome App to register an account, and then the administrator can share permissions to watch.

- Administrator operation: Administrator logs in to SriHome App, click Settings button->Visitor Management->Add->Select operator/visitor->Scan QR code New user App ID QR code (FQA2-5)->Remarks name->Next step is completed (FAQ2-1-FAQ2-3)
- 2. Authorized users: Return to the APP monitoring interface and scroll down to refresh to view the monitoring.(FQA2-6)

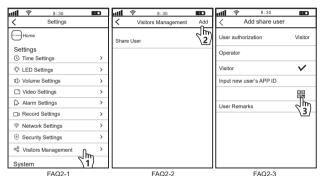

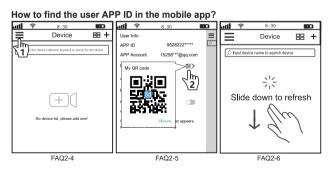

FAQ3: Adding cameras to indoor host

Note: The device and host are paired by default when they leave the factory. There is no need to re-pair them. They are plug-and-play.

(1). Click the camera management icon on the host page

(Note: The host needs to be connected to the network when connecting to the device)



(2). Click System Settings and enter the administrator password (Default 888888).



(3). Click "Hotspot QR Code" in the system settings list to open the QR code



(4). Aim the camera lens at the QR code, maintaining a distance of 20-60cm. After the camera recognizes the QR code, it will emit a "ding" sound, indicating that pairing is in progress. Wait about 10 seconds and hear a second beep, indicating that pairing is successful.

(5). Manually add cameras to the host monitoring window

Click the Select Device menu button in the upper right corner of the monitoring window -> Search Device -> Select the device to add -> Click Add.

(After the device is added successfully, the screen or play button will be displayed on the left monitoring window.)

Note: For low-power products, you need to click the play button to print the image.





FAQ4: How to reset access password and visitor information?

Note: If the device needs to be reset, click to enter the monitoring interface, press and hold the reset button on the back of the product for five seconds with the reset needle, and the reset success prompt will appear on the screen, and the reset is complete.



FAQ5: How does the host delete a camera device?

Click the Select Device menu button in the upper right corner of the window -> Paired Devices -> Select the device you want to delete -> Click Delete.

Note: Please refer to the ID on the device label to avoid accidental deletion.



Other FAQ

Question 1: How to set the language of the indoor host?

Open SriHome App > Enter [Settings] > [System Settings] > [Language Settings] > ok

Question 2: Changing the home Wi-Fi account or password causes the indoor host to go offline.

Open the settings and re-pair the indoor host with WiFi.

Question 3: The app prompts that the indoor host is offline.

- 1. Check whether the indoor Wi-Fi signal is stable.
- 2. Check whether the indoor host is too far from the router. Try installing the indoor host closer to the router or placing the router closer to the indoor host.

Question 4: How to use the electronic photo album?

First, prepare an SD card and save your favorite photos in JPG format. Create a new folder and name it "images". Save the photos to "images" and then insert it into the host.

Question 5: Click the screen, but doorbell does not appears image?

When the monitor is not connected to 2.4G WiFi, click the screen and the image will not appear. At this time, the monitor needs to be connected to 2.4G WiFi. After the monitor network is connected, click the screen to display the door image.